



Europäisches  
Patentamt

European  
Patent Office

PCT / IB 0 3 / 0 5 9 5 9  
Office européen  
des brevets 10 DEC 2003

REC'D 22 DEC 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080370.6

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

30/09/03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 02080370.6

Anmeldetag:  
Date of filing:  
Date de dépôt: 19/12/02

Anmelder:  
Applicant(s):  
Demandeur(s):  
Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Normally white super twisted nematic liquid crystal display device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing:  
Etats contractants désignés lors du dépôt:

AT/BG/BE/CH/CY/CZ/DE/DK/EE/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/

Bemerkungen:  
Remarks:  
Remarques:

This invention relates to a normally white super-twist nematic liquid crystal display device for multiplex operation.

In recent years, the use of twisted nematic liquid crystal displays, such as super twisted nematic liquid crystal displays (STN LCD) has increased within various fields, for example for mobile applications. Super twisted nematic liquid crystal displays are available in various configurations, and examples of such configurations are optical mode interference (OMI) displays and film compensated super twisted nematic (FSTN) displays. Both configurations are comparatively cost-efficient and may be driven by multiplexed addressing techniques. However, both of the above-mentioned configurations have drawbacks.

Regarding OMI displays, an example of such a display is disclosed in the patent document US-5 557 434. This document discloses a display, comprising a plurality of carefully designed compensation films, and hence this construction is comparatively expensive to produce. Moreover, the large number of layers tend to increase the total thickness of the display, which is undesirable, for example when it comes to mobile applications.

Regarding FSTN displays, a schematic drawing of an example of such a display is disclosed in Fig. 1. This configuration essentially comprises a liquid crystal layer, being sandwiched between a front and a back substrate. On a front side thereof, a front polarizer and a compensation film is arranged, whereby the film is sandwiched between the front substrate and the front polarizer. On a backside thereof, a back polarizer and a translector is arranged, whereby the back polarizer is sandwiched between the back substrate and the translector. However, this construction has a couple of disadvantages in the reflective mode. First, the display experiences parallax, which results from the position of the translector, i.e. behind the back polarizer. Secondly, the display suffers from relatively low brightness in the reflective mode, resulting from absorption of light by the polarizers, due to the fact that light in this construction must pass a polarizer four times before reaching an

observer of the display, and every polarizer passage results in a loss of brightness due to absorption.

In order to increase the brightness in the reflective mode, super twisted nematic displays utilizing a so-called internal, in-cell reflector (transflector) has been developed. Examples of such displays are disclosed in Fig. 2 (internal reflector) and Fig. 3 (internal transflector). In both embodiments, the reflector/transflector is positioned in the liquid crystal cell, i.e. between the substrates, and hence the number of polarizer passes in the reflective mode will be reduced.

Super twisted nematic liquid crystal displays making use of an internal transflector or reflector may essentially be of one of two types, normally white (NW) or normally black (NB). Both types make use of front optical stack, positioned on an observer side of the liquid crystal cell, the front optical stack comprising a front polarizer and one or two compensation films and usually a light scattering film, located between the front substrate and the compensation film or films. If an internal transflector is used (see Fig. 3), the display further comprises a rear optical stack, comprising a polarizer, and one or two compensation films, the polarizer and the compensation films together constituting a so-called circular polarizer. For both NW and NB displays, the retardation and the twist angle of the twisted nematic liquid crystal layer commonly used in STN LCDs with internal reflector or transflector are typically 760-860 nm and 240°-270°, respectively.

However, as indicated above there is still a need for displays, that may be manufactured at a lower cost, and also having a reduced thickness, as compared to the prior art displays described above. Hence, an object of this invention is to achieve a reflective or transflective STN display, which may be realized in a cost-efficient manner. Yet an object of this invention is to achieve a reflective or transflective STN display having a reduced thickness, and yet an object of this invention is to achieve a reflective or transflective STN display having a higher off-state brightness in a reflective mode, as compared to a reflective FSTN LCD.

The above and other objects are at least partly achieved by the invention by a normally white super-twist nematic liquid crystal display device for multiplex operation as described by way of introduction, further comprising a liquid crystal cell essentially comprising a liquid crystal layer, being sandwiched between a front and a rear substrate, an at least partly reflective film, arranged in proximity with said rear substrate, and a front optical stack, arranged on a viewer side of the front substrate, the stack comprising one or more

optical films, wherein the front optical stack consists essentially of a polarizer and an optional light scattering film.

By positioning the at least partly reflective film, arranged in proximity with said rear substrate, and using a suitably designed liquid crystal layer, the front optical stack may essentially consist of only a polarizer and an optional light scattering film, i.e. no compensation films are needed in the front optical stack. Hence, the inventive display may be manufactured at a lower cost, and also be made thinner than corresponding prior art displays. According to the invention, the retardation of said liquid crystal layer is suitably in the interval 500-750 nm.

According to one embodiment of the invention, said at least partly reflective film is a reflective film, enabling reflective operation of the display device.

According to a second embodiment, said at least partly reflective film is a transfective film, enabling transfective operation of the display device. Suitably the transfective display comprises a back optical stack, arranged on a back side of the liquid crystal layer, the stack comprising one or more optical films. The rear optical stack suitably comprises a rear polarizer and a compensation film, being arranged between the rear polarizer and the liquid crystal cell.

The invention may utilize an at least partly reflective film being arranged as an in-cell internal reflector, between said front and rear substrate. Alternatively, said at least partly reflective film is arranged in said rear optical stack, essentially adjacent to said rear substrate.

The invention will hereinafter be described by means of presently preferred embodiments thereof, with reference to the accompanying drawings.

Fig. 1 shows a schematic cross section of a film super twisted nematic liquid crystal display according to the prior art,

Fig. 2 shows a schematic cross section of a reflective super twisted nematic liquid crystal display with an in-cell reflector according to the prior art,

Fig. 3 shows a schematic cross section of a transfective super twisted nematic liquid crystal display with an in-cell translector according to the prior art,

Fig. 4 shows a schematic cross section of a reflective super twisted nematic liquid crystal display with an in-cell reflector according to the invention,

Fig. 5 shows a schematic cross section of a transfective super twisted nematic liquid crystal display with an in-cell translector according to the invention,

Fig. 6 shows a schematic cross section of a reflective super twisted nematic liquid crystal display with an external reflector according to the invention,

Fig. 7 shows a schematic cross section of a transfective super twisted nematic liquid crystal display with an external translector according to the invention,

5 Fig. 8 shows a reflection-voltage graph for six reflective display configurations,

Fig. 9 is a schematic drawing showing the orientation of a front polarizer absorption axis in relation to directions of rubbing for the liquid crystal cell,

10 Fig. 10 is a plot showing the off-state reflection for the six reflective display configurations of Fig. 8,

Fig. 11 is a plot showing the off-state color coordinates for the six reflective display configurations of Fig. 8,

Fig. 12 shows a transmission-voltage graph for a transfective display configuration according to the invention,

15 Fig. 13 is a schematic drawing showing the orientation of the front and rear polarizer absorption axes in relation to directions of rubbing for the liquid crystal cell, and the slow axes of a rear compensation layer for a transfective display according to the invention.

20 This invention is based on the realization that a normally white super twisted nematic liquid crystal display (NW STN LCD) having an in-cell reflector/translector (or a near-cell reflector/translector as will be closed described below) and fulfilling the objects of the invention stated above, may be realized by using a front optical stack consisting solely of a polarizer and an optional light scattering film. Hence, compensation films need not be included in the front optical stack, which is an improvement as compared to prior art.

25 Consequently, the stack may be made thinner, and the manufacturing process may be simplified.

A first embodiment of this invention is disclosed in Fig. 4. This device 1 comprises a super twisted nematic liquid crystal layer 2 being arranged between a front and a back substrate 3, 4. The liquid crystal layer is arranged to be controlled by means of an electrode structure (not shown) on said front and back substrates. Furthermore, the device

30 comprises an in-cell reflector 5, being arranged between the liquid crystal layer 2 and the back substrate 4. Together, the front and back substrate 3, 4, the liquid crystal layer 2 and the in-cell reflector 5 forms a liquid crystal cell 8. On an observer side of the liquid crystal cell 8, a front optical stack 9 is arranged, comprising a front polarizer 7 and an optional light

scattering film 6. It shall in this context be noted that the term light scattering film as used in this application shall be construed as a member scattering light passing through it, and may hence comprise a film formed by one or more individually formed layers. The light scattering

film 6 is sandwiched between the front polarizer 7 and the front substrate 3. The above-

5 mentioned liquid crystal layer 2 has a twist angle of about 195-270°, preferably about 240-270°, in order to be suitable for multiplex operation. Furthermore, the liquid crystal layer 2 is chosen to have a retardation of about 500-750 nm. It shall be noted that this retardation

interval is lower than for prior art FSTN and conventional STN LCDs, which have a retardation within the interval 760-860 nm. Hence, the inventive display may be referred to

10 as a low retardation LCD. By using a low retardation liquid crystal layer together with the proposed front optical stack, the use of compensation films may be avoided. Thereby, the manufacturing cost for the display may be reduced, and at the same time, the thickness of the display may also be reduced. In the above-described embodiment, an in-cell reflector 5 is

used. However, the invention may also be implemented in liquid crystal displays utilizing an  
15 external reflector, such as near-cell reflector for example being fastened on the external side of the rear substrate 4. A second embodiment of this invention, including an external reflector, is disclosed in Fig. 6. This embodiment is similar to the one disclosed in Fig. 4, with the exception that the in-cell reflector 5 of Fig. 4 is excluded, and instead an external reflector 14 is arranged, the reflector being formed on an external side of the rear substrate 4.

20 The present invention may also be realized as a transfective display. A third embodiment of the invention, illustrating this, is shown in Fig. 5. This device 1 comprises a super twisted nematic liquid crystal layer 2 being arranged between a front and a back substrate 3, 4. The liquid crystal layer is arranged to be controlled by means of an electrode structure (not shown) on said front and back substrates. Furthermore, the device comprises an  
25 in-cell translector 13, being arranged between the liquid crystal layer 2 and the back substrate 4. Together, the front and back substrate 3, 4, the liquid crystal layer 2 and the in-cell translector 13 forms a liquid crystal cell 8. On an observer side of the liquid crystal cell 8, a front optical stack 9 is arranged, comprising a front polarizer 7 and an optional light scattering film 6. It shall in this context be noted that the term light scattering film as used in  
30 this application shall be construed as a member scattering light passing through it, and may hence comprise a film formed by one or more individually formed layers. The light scattering film 6 is sandwiched between the front polarizer 7 and the front substrate 3. Moreover, on a rear side of the liquid crystal cell 8, a rear optical stack 8 is arranged, comprising a rear polarizer 12, and a compensation film 11, sandwiched between the rear polarizer 12 and the

back substrate. Also in this case, the above-mentioned liquid crystal layer 2 has a twist angle of about 195-270°, preferably about 240-270°, in order to be suitable for multiplex operation.

Furthermore, the liquid crystal layer 2 is chosen to have a retardation of about 500-750 nm. It

shall be noted that this retardation interval is lower than for prior art FSTN and conventional

STN LCDs, which have a retardation within the interval 760-860 nm. Hence, the inventive

display may be referred to as a low retardation LCD. By using a low retardation liquid crystal

layer together with the proposed front optical stack, the use of compensation films may be

avoided. Thereby, the manufacturing cost for the display may be reduced, and at the same

time, the thickness of the display may also be reduced. In the same way as above, the

invention may also be implemented in liquid crystal displays utilizing an external

transflector, such as a near-cell transflector for example being fastened on the external side of

the rear substrate 4. A fourth embodiment of this invention, including an external transflector,

is disclosed in Fig. 7. This embodiment is similar to the one disclosed in Fig. 5, with the

exception that the in-cell transflector 13 of Fig. 5 is excluded, and instead an external

transflector 15 is arranged, the transflector being sandwiched between the rear substrate 4 and

the compensation film 11. In both cases, the external reflector/transflector may for example

be attached to the rear substrate 4 by means of gluing. In both transfective embodiments

disclosed in Figs. 5 and 7, a compensation film 11 is included in the rear optical stack 10.

The transmission-voltage curve for a transfective LRE STN LCD, having a retardation of

650 nm and a front polarizer angle  $\alpha_p=60^\circ$  (see Fig. 9) is disclosed in Fig. 12 while the

optical configuration of this display is disclosed in Fig. 13. In this case, the compensation

film 11 is constituted by a 140 nm quarter wave plate.

The effect of the low retardation super twisted nematic liquid crystal displays

disclosed above, will hereinafter be described in closer detail. Fig. 8 shows the reflection-

voltage curve for six different super twisted nematic displays:

1) a standard FSTN display with a retardation of about 820 nm.

2) a 240° twist conventional NW STN display with an internal reflector and a retardation of about 820 nm.

3) a LRE STN according to the invention with an internal reflector (see Fig. 4) and a retardation of 550 nm and a front polarizer angle  $\alpha_p=50^\circ$  (will be closer described below).

4) a LRE STN according to the invention with an internal reflector (see Fig. 4) and a retardation of 600 nm and a front polarizer angle  $\alpha_p=55^\circ$  (will be closer described below).



- 5) a LRE STN according to the invention with an internal reflector (see Fig. 4) and a retardation of 650 nm and a front polarizer angle  $\alpha_{fp}=60^\circ$  (will be closer described below).
- 6) a LRE STN according to the invention with an internal reflector (see Fig. 4) and a retardation of 700 nm and a front polarizer angle  $\alpha_{fp}=65^\circ$  (will be closer described below).

5

In all cases, the curves of Fig. 8 were calculated assuming that the reflector is ideal, i.e. has a reflection of 100%. As is indicated by Fig. 8, the inventive LRE STN displays (3-6) have lower retardation values than the prior art displays (1-2). Moreover, it is seen from Fig. 8 that the steepness of the reflection-voltage curves does not differ much between the different displays. This implicates that the multiplex capability of the LRE STN displays (3-6) is comparable to that of the standard and conventional displays (1-2). The front polarizer angle  $\alpha_{fp}$  defines the orientation of the absorption axis of the front polarizer 7, as indicated by Fig. 9. Fig. 9 also discloses the rubbing directions of the affecting the alignment of the liquid crystal layer 2 on per se known manner.

10

15

Fig. 10 discloses the off-state reflections of the above-defined display configurations (1-6). As is seen from Fig. 10, the off-state reflection of the LRE STN LCDs (3-6) according to the invention is higher than the corresponding off-state reflection of the FSTN LCD (1), but lower than the off-state reflection of the conventional LCD (2) with an internal reflector (or transflector) and two compensation films. Hence, the Off-state reflection of the inventive LRE STN LCDs are at a satisfactory level.

20

Fig. 11 discloses the off-state color coordinates in a reflective mode for the above-defined display configurations (1-6). As is seen from Fig. 11, the off-state color neutrality of the LRE STN LCDs (3-6) is somewhat bluish. However, the color neutrality of the inventive LRE STN LCDs (3-6) is better than the color neutrality of the prior art displays (1-2).

25

## CLAIMS:

EPO - DG 1

19. 12. 2002

(92)

1. A normally white super-twist nematic liquid crystal display device for multiplex operation, comprising:

- a liquid crystal cell essentially comprising a liquid crystal layer, being sandwiched between a front and a rear substrate,

5 -an at least partly reflective film, arranged in proximity with said rear substrate, and

-a front optical stack, arranged on a viewer side of the front substrate, the stack comprising one or more optical films,

-wherein the front optical stack consists essentially of a polarizer and an optional light scattering film.

10

2. A display device as in claim 1 wherein the retardation of said liquid crystal layer is in the interval 500-750 nm.

15 3. A display device as in claim 1 or 2, wherein said at least partly reflective film is a reflective film, enabling reflective operation of the display device.

4. A display device as in claim 1 or 2, wherein said at least partly reflective film is a transfective film, enabling transfective operation of the display device.

20 5. A display device as in claim 4, further comprising a rear optical stack, arranged on a back side of the liquid crystal layer, the stack comprising one or more optical films.

25 6. A display device as in claim 5, wherein said rear optical stack comprises a rear polarizer and a compensation film, being arranged between the rear polarizer and the liquid crystal cell.

7. A display device as in any one of the preceding claims, wherein said at least partly reflective film is arranged as an in-cell internal reflector, between said front and rear

substrate.

8. A display device as in any one of the preceding claims, wherein said at least partly reflective film is arranged in said rear optical stack, essentially adjacent to said rear

5 substrate.


## ABSTRACT:

EPO - DG 1


~~19. 12. 2002~~

This invention relates to a normally white super-twist nematic liquid crystal <sup>(92)</sup> display device for multiplex operation, comprising a liquid crystal cell essentially comprising a liquid crystal layer (2), being sandwiched between a front and a rear substrate (3, 4), an at least partly reflective film (5, 13, 14, 15), arranged in proximity with said rear substrate (4),  
5 and a front optical stack, arranged on a viewer side of the front substrate, the stack comprising one or more optical films, wherein the front optical stack consists solely of a polarizer (7) and an optional light scattering film (6).


Fig. 4

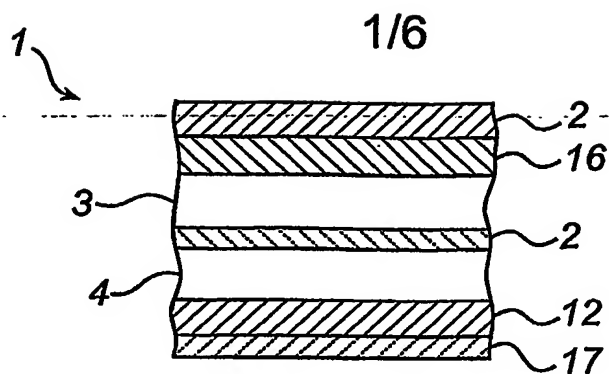

(Prior art) Fig. 1

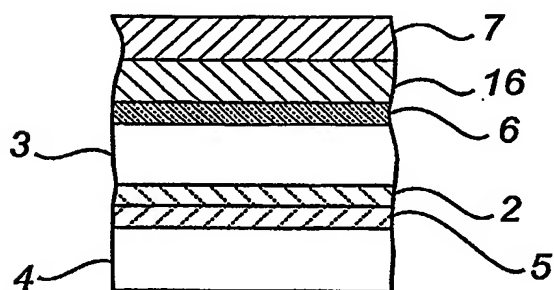

(Prior art) Fig. 2

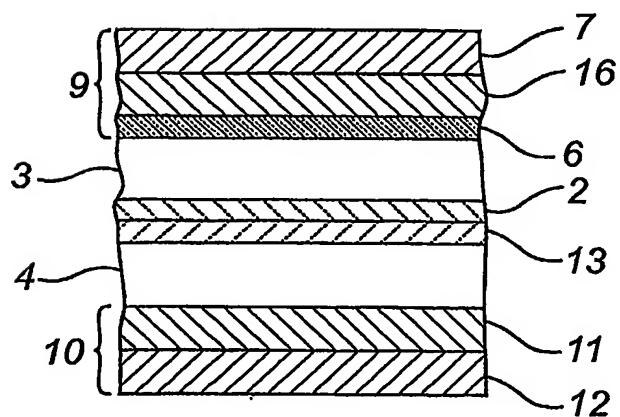

(Prior art) Fig. 3

2/6

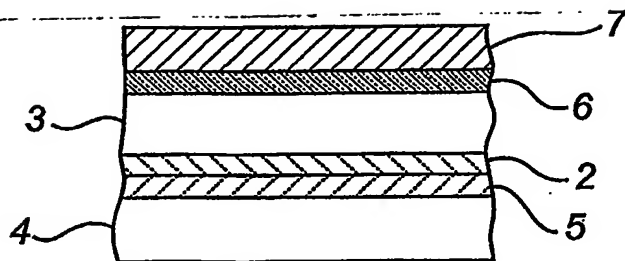


Fig. 4

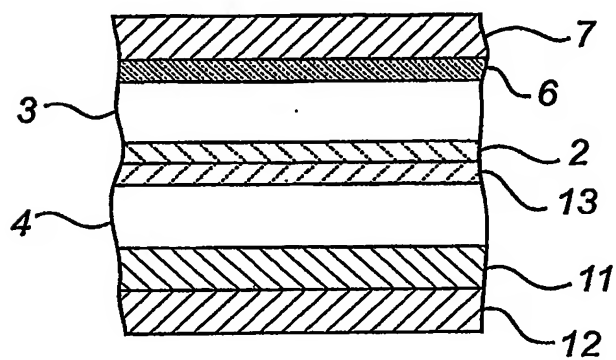


Fig. 5

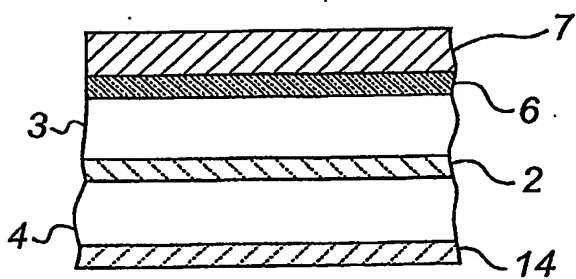


Fig. 6

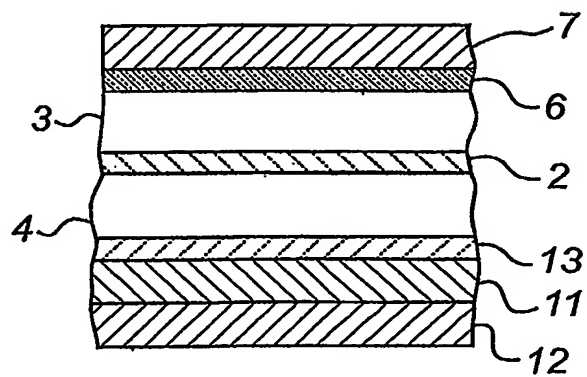


Fig. 7

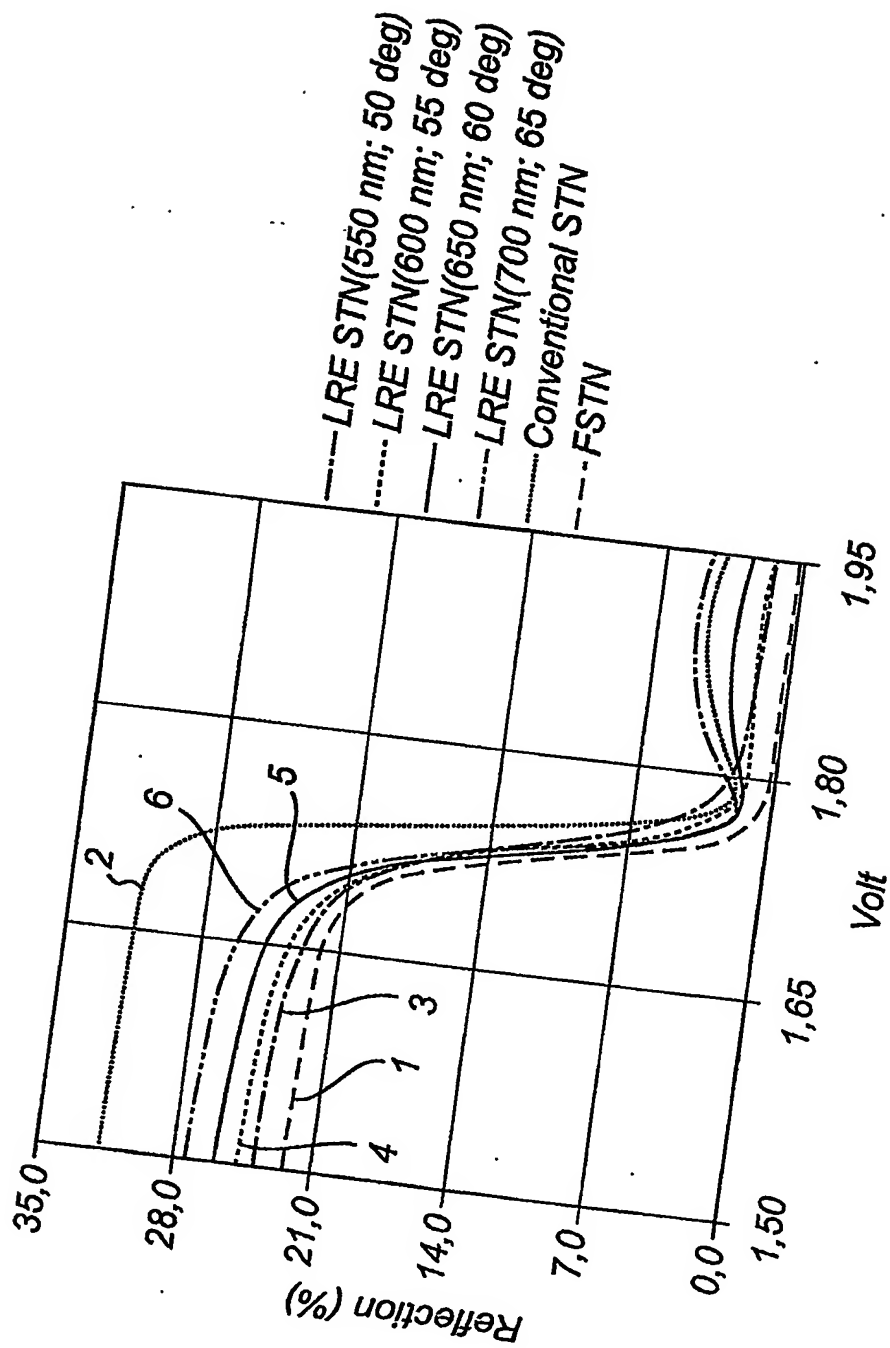


Fig. 8

4/6

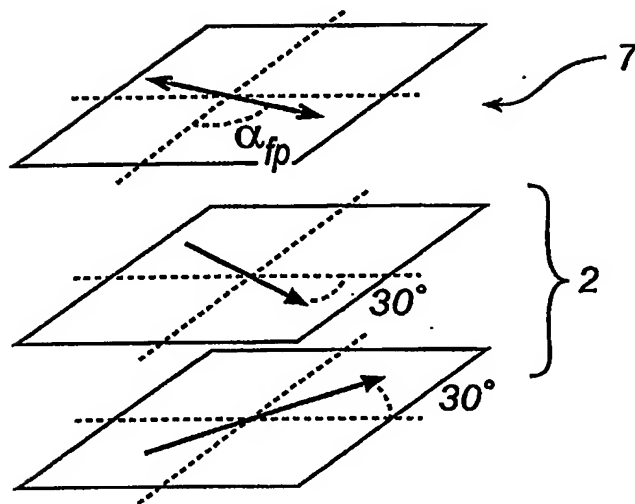


Fig. 9

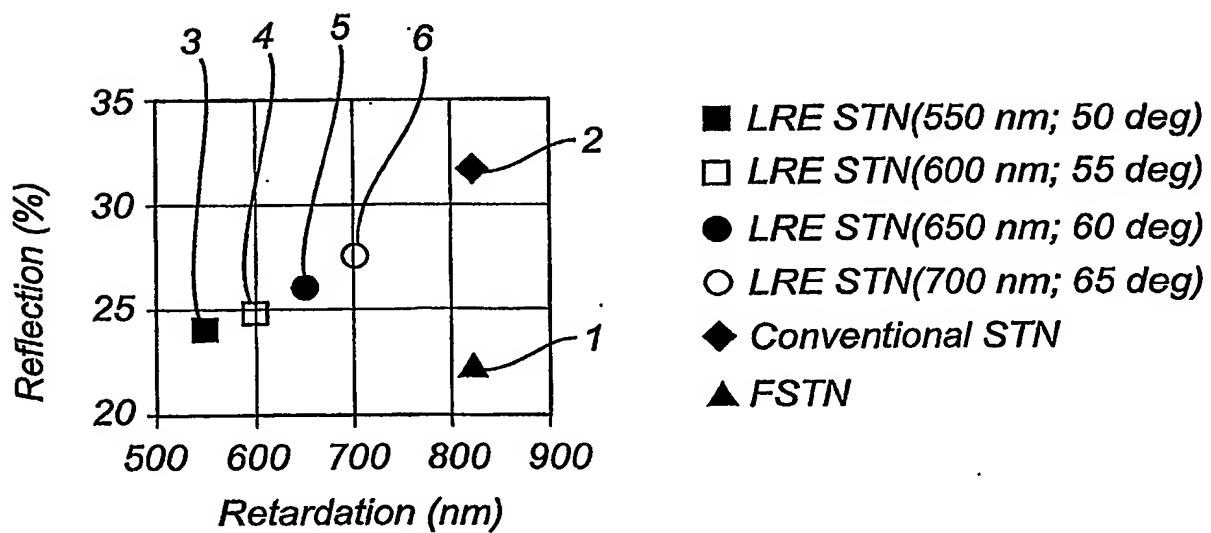


Fig. 10



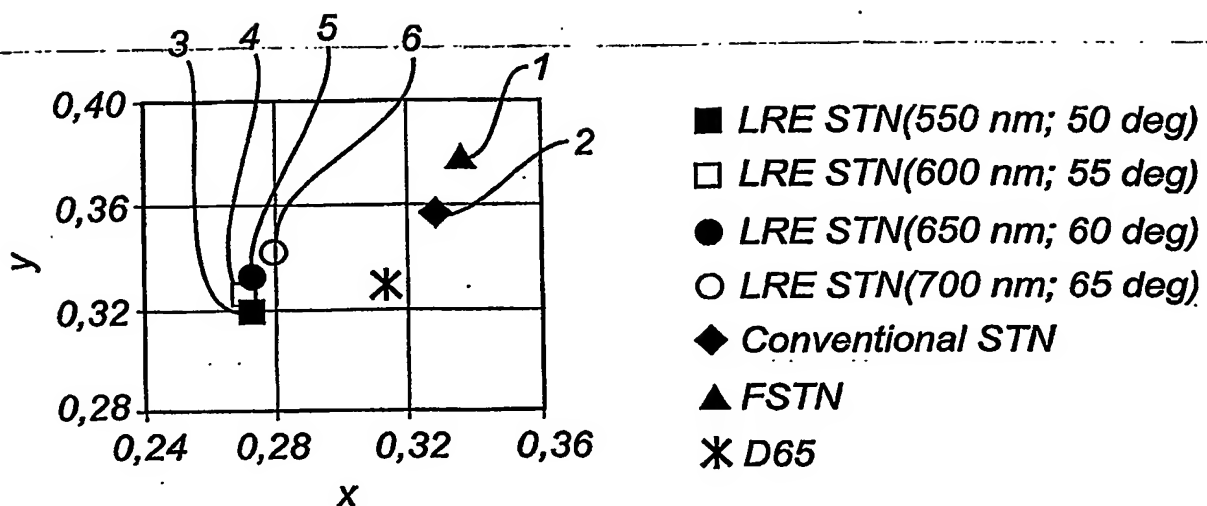


Fig. 11

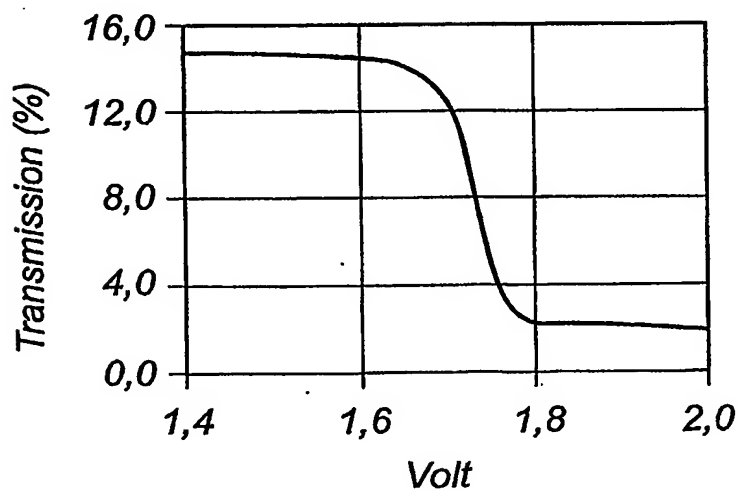
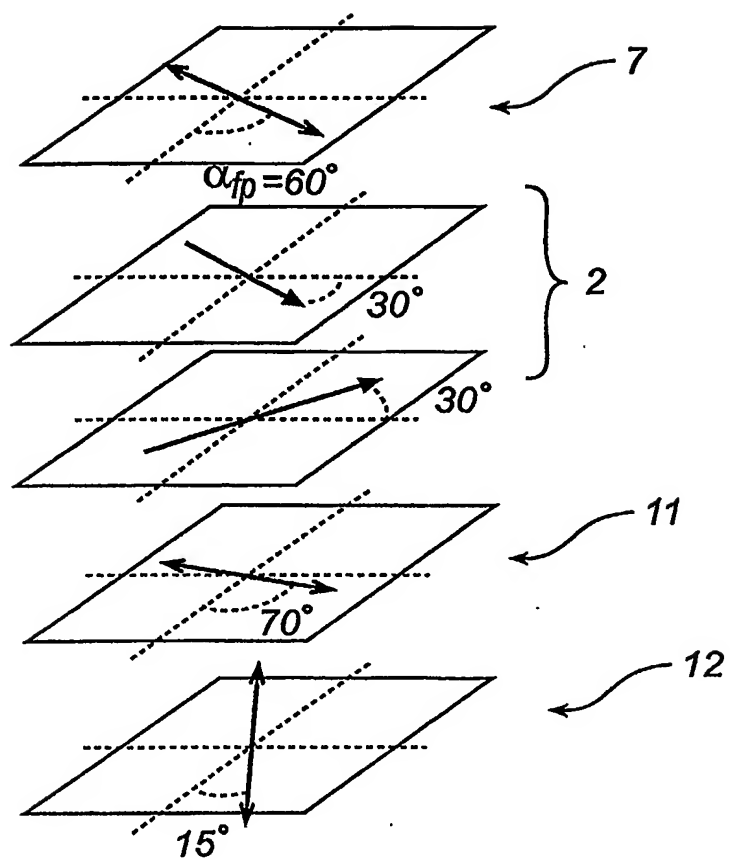


Fig. 12

*Fig. 13*

**This Page Blank (uspto)**

PCT Application

**IB0305959**

